

**CORNELL PUMP COMPANY**

400 - 1250 GPM

Model 4RB

75 - 240 Feet TDH

STANDARD SPECIFICATION**Discharge** - 4 inch discharge**Suction** - 6 inch suction**Impeller** - Enclosed, 7 vane: silicon bronze**Volute** - Right and left hand tangential discharge,
four positions**Mechanical Seal or Traditional Packing** - Single
type1 carbon ceramic mechanical seal: Cycloseal®
design, Run-dry available**Materials of Construction**


- Cast iron casing, cast iron, bronze fitted
- Other materials available

MOUNTING OPTIONS

- **Close Coupled Electric**
 - Cornell's Energy Efficient Design
- **Frame Mount**
 - Cornell F16
- **Engine Bracket**
 - Cornell EM16 (SAE 1, 2, 3, 4)


AVAILABILITY

- **Quick Ship**
 - Finished Product Regularly Stocked
(48 Hours)
- **Preferred Pump**
 - Finished Components Regularly Stocked
(10 business days)
- **Specialty Pump**
 - Cornell Pump Company will design and
manufacture a variation of this pump
specifically designed for your application

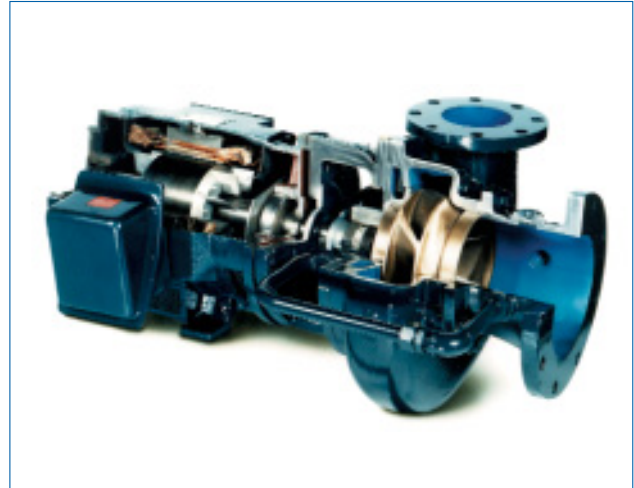**FEATURES & BENEFITS**

- **Cornell's Tradition of Excellence:**
 - **Highest quality products**
 - **Experience**
 - Over 50 years in the centrifugal pump business
 - **Optimum Hydraulics**
 - In house engineering staff and test lab facilities
 - **Strong Local Dealer Support**
 - Our agricultural products are sold only through
authorized dealerships
 - Dealerships provide full service to customers from
sales to replacement parts
 - Dealers maintain and improve their knowledge at
educational activities like Cornell's "Pump School"
- **Exceptional Design:**
 - **Efficiency**
 - Effectively converts energy into fluid flow and
pressure
 - **Long Product Life**
 - Thick walled castings
 - Heavy duty shafts
 - 20,000 hour bearings
 - Replaceable wear rings and shaft sleeves
 - Reduced thrust load through design and balance
lines where appropriate

PERFORMANCE CURVES

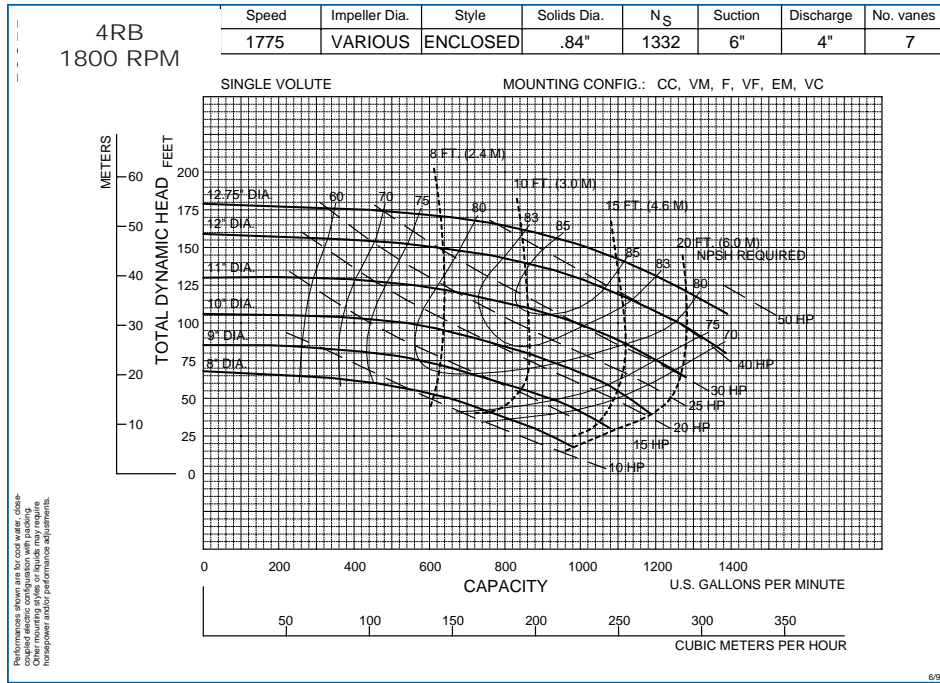

Note:
Curves also available in 1200 and various RPM

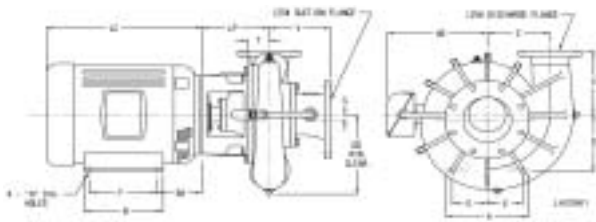


Figure 1

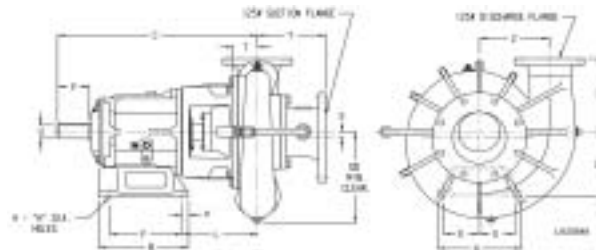


Figure 2

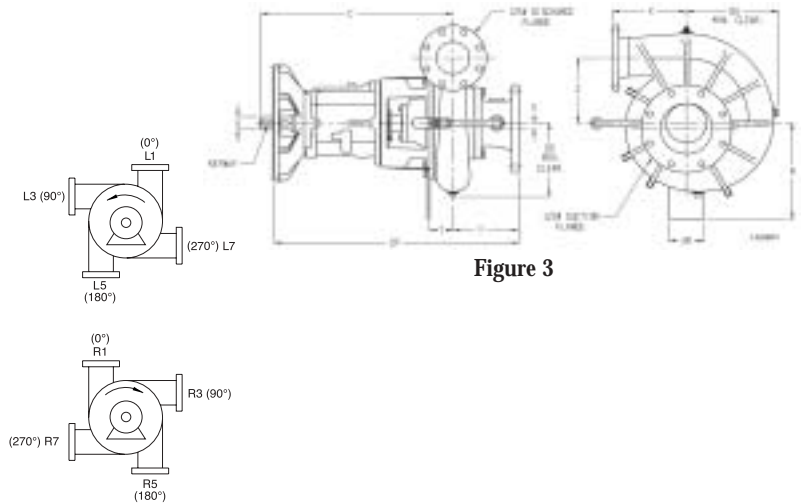


Figure 3

PUMP DIMENSIONS

MOUNT	AK	Fig.	A	AR	B	C	CP	D	DA	DD	E	F	H	L	LP	P	R	S	T	U	V	X	Y	Z	KEYWAY
CC	8.5	1	-	-	-	-	-	-	-	10.88	-	-	-	-	7.62	-	-	-	3.12	-	-	10	7.38	8	-
	12.5	1	-	-	-	-	-	-	-	10.88	-	-	-	-	7.62	-	-	-	3.12	-	-	10	7.38	8	-
F16	-	2	12	-	12.88	25.75	-	9.75	-	11	5.12	10.38	0.81	7.9	-	0.88	-	-	3.12	2	4.5	10	7.38	8	.50 X .25
EM16	-	3	-	5.25	-	25.75	31.12	-	11	10.25	-	-	-	-	-	-	14.88	-	3.12	2	-	10	7.38	8	.50 X .25

MOTOR DIMENSIONS

MOTOR FRAME	AK DIM.	A	B	D	E	F	H	AB	BA	LC
143-5	4.5	6.5	5.94	3.5	2.75	5	0.34	5.62	2.88	10
182-3	4.5	8.62	6.5	4.5	3.75	5.5	0.41	6.75	3.5	12.25
	8.5	8.62	6.5	4.5	3.75	5.5	0.41	6.75	3.5	12.25
213-5	8.5	9.5	8	5.25	4.25	7	0.41	7.94	4.5	13.69
254-6	8.5	11.25	11.25	6.25	5	10	0.53	9.5	5	17.94
284-6	12.5	12.25	12.25	7	5.5	11	0.53	11.37	5	21.31
324-6	12.5	14.25	13.75	8	6.25	12	0.66	12.22	5.5	22.19
364-5	12.5	15.75	14	9	7	12	0.66	13.2	6.12	24.31
404-5	12.5	18.5	16.62	10	8	13.75	0.81	16.39	6.88	29.97

Cornell Pump Company

P.O. Box 6334

Portland, Oregon 97228-6334

Web: www.cornellpump.com

Phone: (503) 653-0330 • Fax: (503) 653-0338

ISO9001:2000 CERTIFIED