

AVAILABLE MOUNTING CONFIGURATIONS

6813ZX-F FRAME MOUNT
6813ZX-RP-F REDI-PRIME FRAME MOUNT
6813ZX-EM ENGINE MOUNT
6813ZX-RP-EM REDI-PRIME ENGINE MOUNT
6813ZX-CC CLOSE- COUPLED

OPERATING LEVELS

MIN FLOW	450 GPM	102.20 m ³ /h
MAX FLOW	2150 GPM	488.31 m ³ /h
DISCHARGE SIZE	6"	152.4 mm
SUCTION SIZE	8"	203.2 mm
SOLIDS HANDLING	1"	25.4 mm
MAX SPEED	1800 RPM	1800 RPM
SHUT-OFF HEAD	185'	56.38 m
BEP HEAD	155'	47.24 m
BEP FLOW	2150 GPM	488.31 m ³ /h
BEP PERCENT	84%	84%
HP RANGE	100 HP	100 HP
OPERATING SPEEDS	1000 to 1800 RPM	1000 to 1800 RPM
MAX OPERATING TEMP	250° F	121.1° C




A typical picture of the pump is shown. Please contact Cornell Pump Company for further details. All information is approximate and for general guidance only.

PARTS	STANDARD MATERIAL (ALL IRON)	CD4MCU
WEAR RING	ASTM A395 DUCTILE IRON	ASTM A890 GR 1B CD4MCU
IMPELLER	ASTM A395 DUCTILE IRON	ASTM A890 GR 1B CD4MCU
VOLUTE	ASTM A395 DUCTILE IRON	ASTM A890 GR 1B CD4MCU
BACKPLATE	ASTM A395 DUCTILE IRON	ASTM A890 GR 1B CD4MCU
BEARING HOUSING	ASTM A395 DUCTILE IRON	DI (DUCTILE IRON)
SHAFT	SAE 1144 STRESSPROOF STEEL	SE (316 STAINLESS)
SHAFT SLEEVE	SE (316 STAINLESS)	FA (CD4MCU)


The 6813ZX pump is designed with Cornell's renowned quality and durability. It features a 6" discharge, 8" suction, and enclosed impeller with a centerline ANSI dimensional volute. Available in All Iron or CD4MCu materials. Frame Mounted, Engine Mounted or Close Coupled configurations are available with a Type 1 single mechanical, cartridge seals, or packing.

- Meets ANSI Dimensional Standards
- Centerline Construction
- Frame Mounted, Engine Mounted or Close Coupled
- Redi-Prime® or Run-Dry® available
- Oil Lubricated Bearing Frame
- Oversized Oil Capacity
- Isolator Bearing Frame Seals
- Cartridge or Type 1 Mechanical Seals
- Hydraulic Balance Line
- Pulse Vibration and Temperature Monitor
- Co-Pilot Ready
- Industry-leading two-year warranty
- Industry-leading efficiencies
- Heavy duty construction



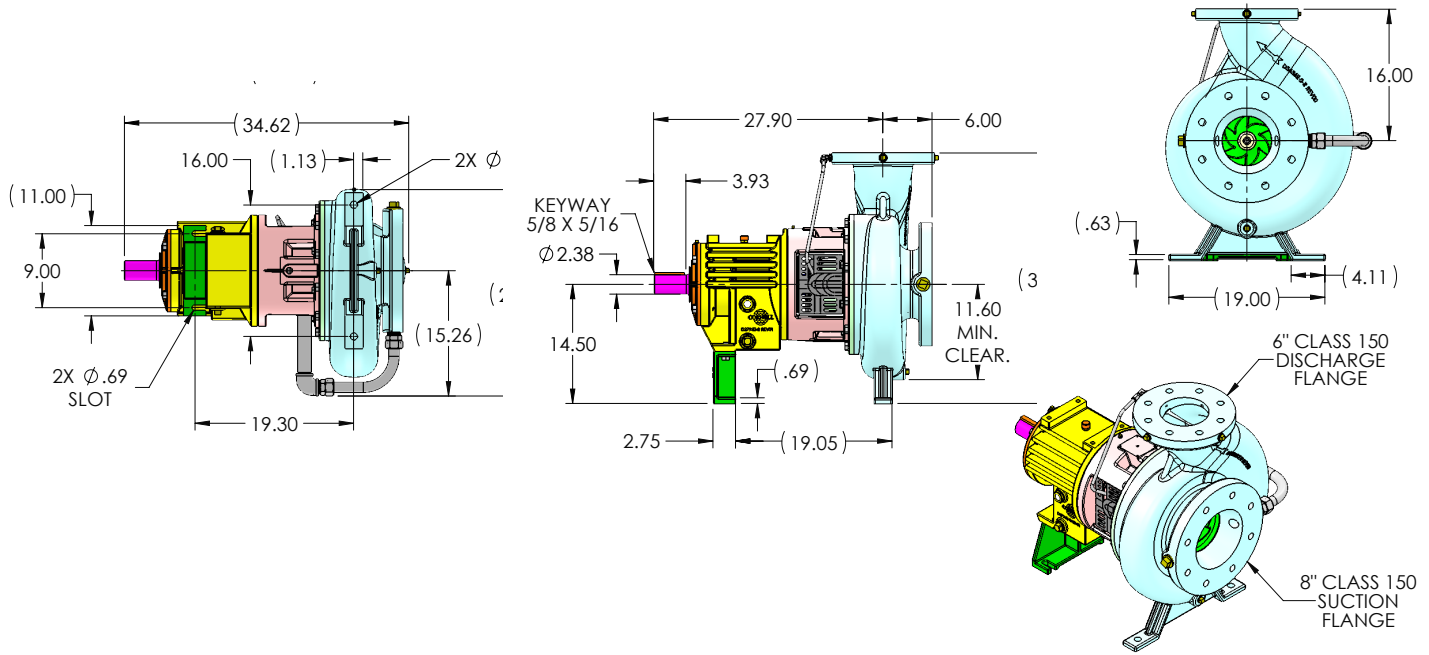

Speed	Impeller Dia.	Style	Volute	Solids Dia.	N _s	Suction	Discharge	No. Vanes
VARIOUS	13.50 in	ENCLOSED	DOUBLE	1.0 in	1722	8 in	6 in	6

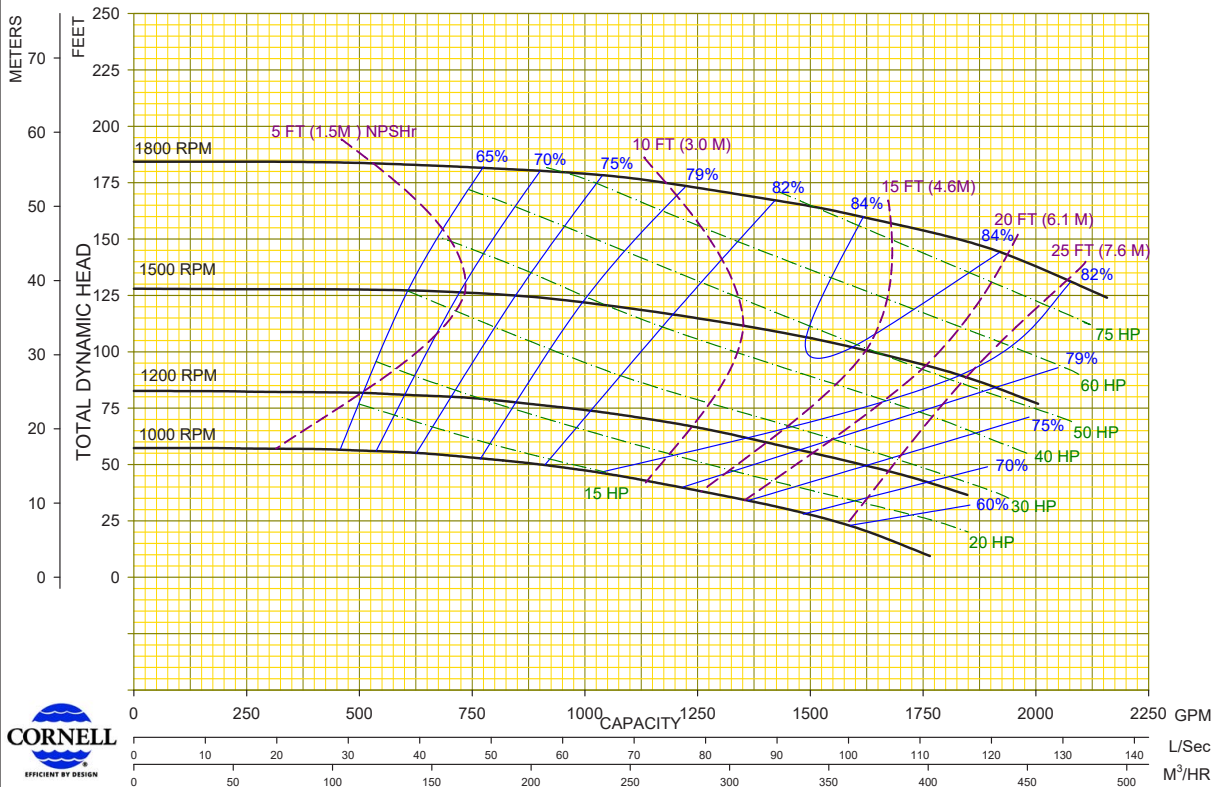

Cornell Pump Company • Clackamas, Oregon

00 6/30/22 JRW/AL MODEL: 6813ZX
X X X TYPE: ANSI

CURVE NO: 6813ZXVA